









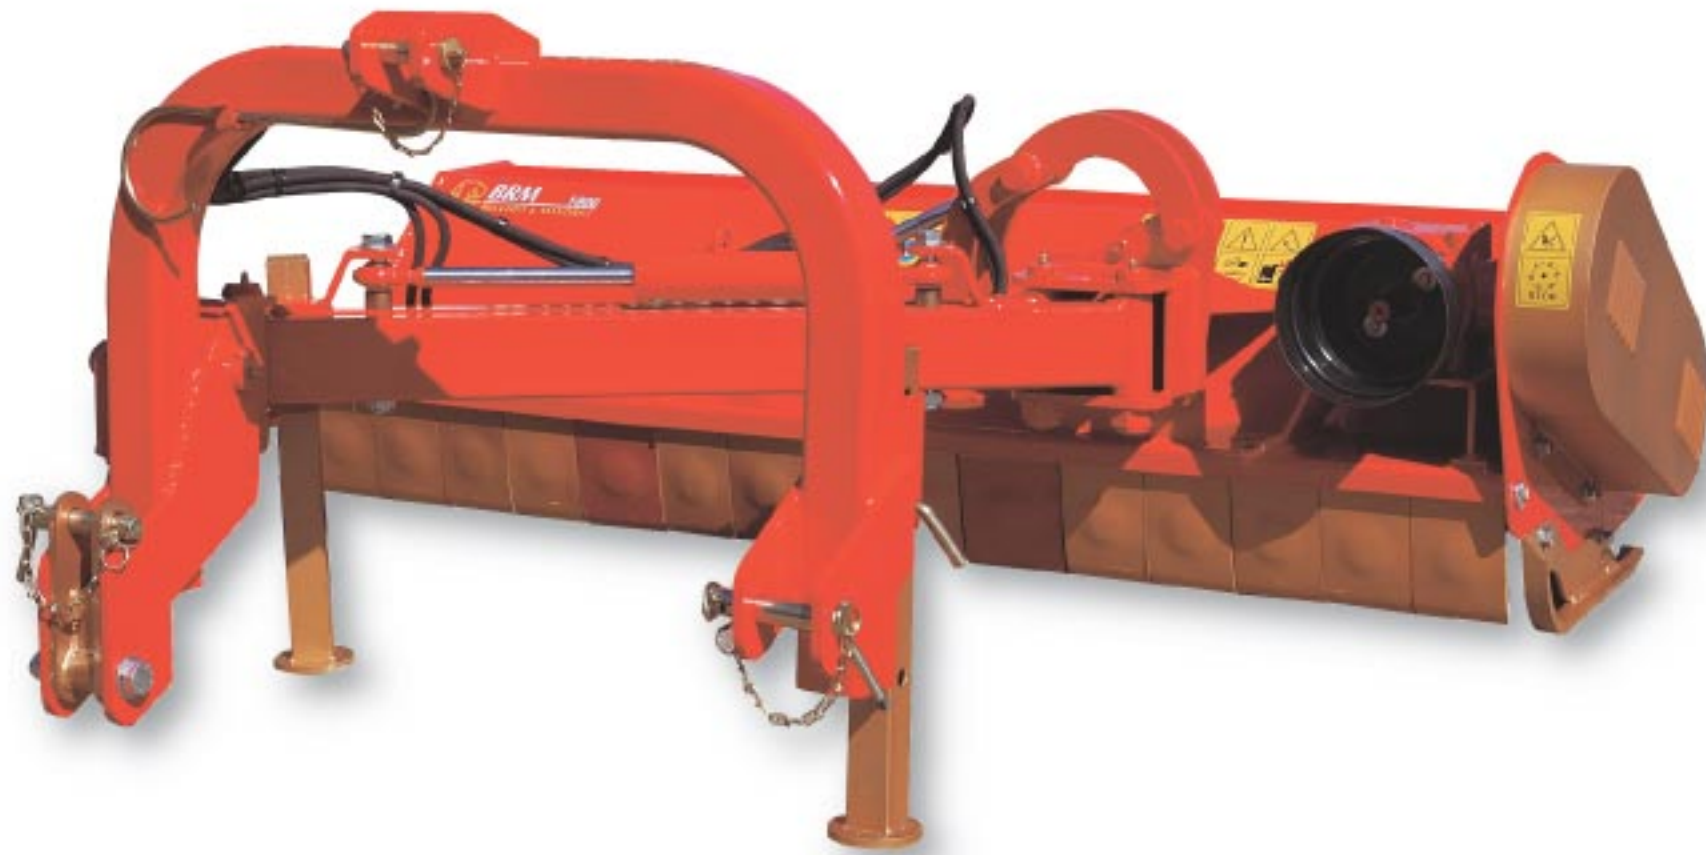

TRINCIA LATERALE VERSIONE MEDIA

MEDIUM VERSION SHREDDER



DATI TECNICI

TECHNICAL DATA

CODICE	 cm	 cm	 Hp	 Kg	 r.p.m.	 r.p.m.	 n°	 n°	 n°	
BRM 140	140	155	30-40	370	540	2200	3	14	42	
BRM 160	160	175	40-50	425	540	2200	3	16	48	
BRM 180	180	195	50-60	480	540	2200	4	18	54	
BRM 200	200	215	60-70	540	540	2200	4	20	60	

DOTAZIONE STANDARD

STANDARD EQUIPMENT

- | | |
|---|---|
| <ul style="list-style-type: none"> • Scatola ingranaggi con ruota libera 540 giri/min • Mazze o coltelli • Controcoltello • Rullo • Doppia lamiera • Cofano chiuso • Ammortizzatore meccanico • Attacco articolato • Albero cardanico omocinetico • Inclinazione testata trinciante: + 90°-60° • Rotore diam. 140 • Cuscinetti orientabili a rulli • Il trattore deve avere 2 distributori d'olio a doppio effetto • Protezioni antinfortunistiche "CE" | <ul style="list-style-type: none"> • Gearbox with fifth wheel 540 r.p.m. • Hammers or knives • Counter knife • Roller • Double sheet • Closed casing • Mechanical shock absorber • Articulated coupling • Homocinetic cardan shaft • Degree of inclination of cutting head: + 90° - 60° • Rotor diameter: 140 • Adjustable roller bearings • The tractor must have 2 oil distributors double rotation • "CE" accident protections |
|---|---|

ACCESSORI

ACCESSORIES

BRM510	Comandi a cavi flessibili	Flexible cable controls	
BRM505	Slitte	Skids	